


## TR35IXP4-OF

Total volume - Capacité total - Capacidad totale	1.2 Cu. Ft.
Net Weight - Poids net - Peso neto	36.8 lbs.
Power supply	12/24 Vdc
Alimentation	100-240 Vac 50/60 Hz
Alimentación	100-240 Vac 50/60 Hz
Nominal consumption	12 Vdc 115 Vac 60 Hz
Consommation nominale	31 W (2.58 A) 31 W (0.44 A)
Consumo nominal	31 W (2.58 A) 31 W (0.44 A)



**New PUSH-TURN locking system**  
 Nouvelle fermeture PUSH-TURN  
 Nueva cierre PUSH-TURN

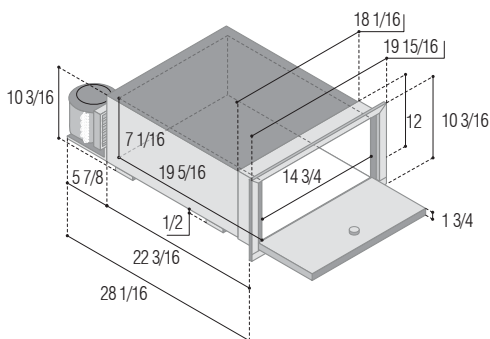


## TR35IBP4-O



**New PUSH-TURN locking system**  
Nouvelle fermeture PUSH-TURN  
Nueva cierre PUSH-TURN



Total volume - Capacité totale - Capacidad totale	1.2 Cu. Ft.
Net Weight - Poids net - Peso neto	35.3 lbs.
Power supply Alimentation Alimentación	12/24 Vdc 100-240 Vac 50/60 Hz
Nominal consumption Consommation nominale Consumo nominal	12 Vdc 115 Vac 60 Hz 31 W (2.58 A) 31 W (0.44 A)

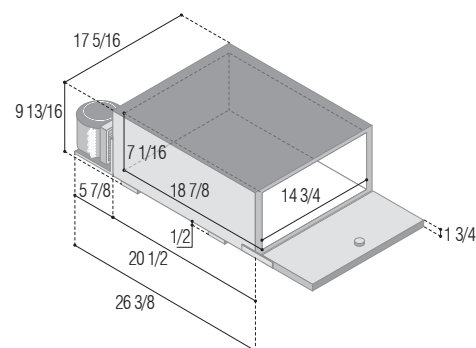


## TR47IBP4-L

Total volume - Capacité totale - Capacidad totale	1.6 Cu. Ft.
Net Weight - Poids net - Peso neto	41.8 lbs.
Power supply Alimentation Alimentación	12/24 Vdc 100-240 Vac 50/60 Hz
Nominal consumption Consommation nominale Consumo nominal	12 Vdc 115 Vac 60 Hz 31 W (2.58 A) 31 W (0.44 A)


Mounting flange  
Cadre de fixation  
Perfil de fijación

t: 1  
w: 23 1/8  
h: 14 15/16

**Flush Flange**



**Surface Flange**



Built-in  
Compartment encastrément  
Alojamiento empotrado

a: 26 5/8  
b: 17 1/2  
c: 15 1/2

a: 24 15/16  
b: 17 1/2  
c: 15 1/2

